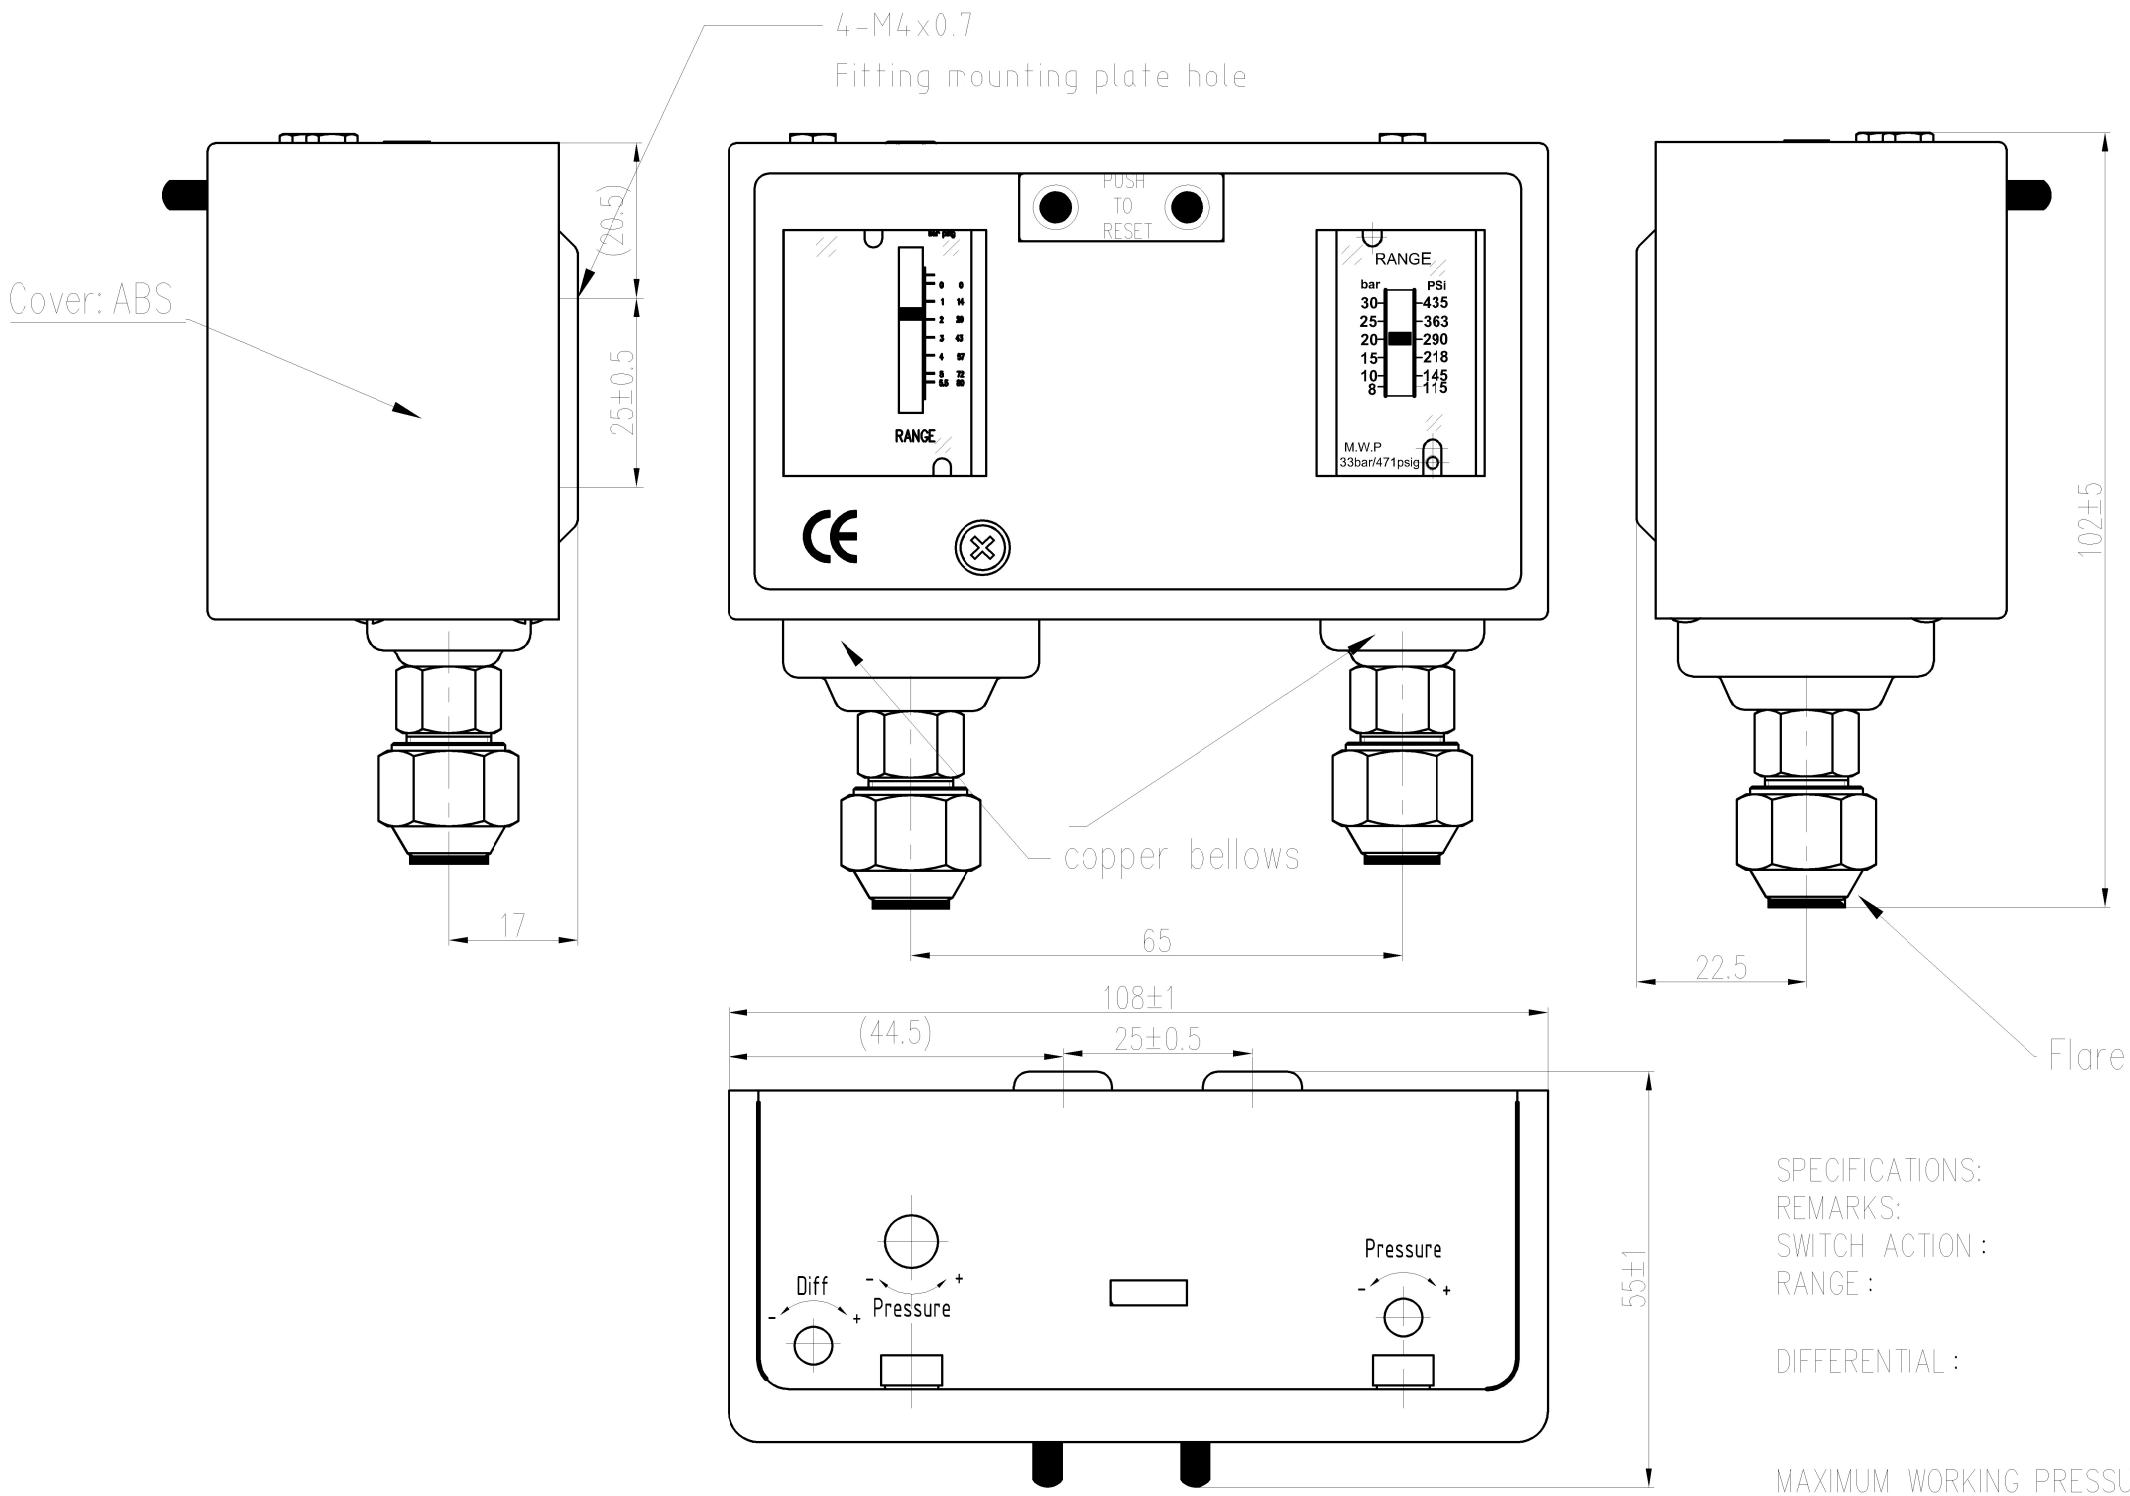


SPDT	CONTACT LOAD	
	125V AC	250V AC
FLA	16A	8A
LRA	96A	48A
RESISTIVE LOAD	16A	8A
PILOT DUTY	3A	3A

SPECIFICATIONS:

REMARKS: PRESSURE SWITCH

SWITCH ACTION: SPDT*2

RANGE: LOW PRESSURE ADJUSTABLE,-0.5~5.5bar
HIGH PRESSURE ADJUSTABLE,8-30bar

DIFFERENTIAL: LOW PRESSURE ≤1bar(Manual reset)
HIGH PRESSURE ≤5bar(Manual reset)

MAXIMUM WORKING PRESSURE: LOW PRESSURE 16.5bar
HIGH PRESSURE 33bar

PRESSURE CONNECTION: 1/4"Flare

CUSTOM OPTIONS: SUPPLIED WITH MOUNTING SCREWS
LOW PRESSURE FACTORY SET RANGE TO 1bar
HIGH PRESSURE FACTORY SET RANGE TO 20bar

Design		PRESSURE CONTROL DRAWING	060-124566R
	No.		1 : 1
	DATE 2022/4/23		2 1
			ФРИДАН